


# General Instructions for Use

**DO NOT PLUG POWER CORD IN UNTIL LATER**

## **Unpack Equipment**

Includes: Microphone, Receiver, Power Cord, and Audio Cable (2 X AA batteries installed in Microphone)

## **Connect Receiver to Amp/Mixer**

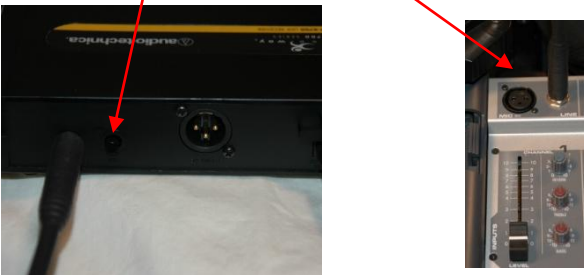

## **Extend Antennas and position at 45 Degrees**



## **Microphone Will Work Up To 200' From the Receiver with Correct Placement**

- Try to Maintain LINE OF SIGHT Between the Microphone and the Receiver
- Maintain at Least 6' Between the Microphone and the Receiver
- Maintain at Least 3' from the Wall and the Floor to the Receiver
- Keep the Receiver away from other Transmitters and Flat Metal Surfaces

## **Plug the AC Power Cord into the Receiver**

## **Turn the Microphone on by Pushing and Holding the Button on the Bottom of the Microphone for at Least 2 Seconds**

There is a Green Light in the Center When On  
One of the Diversity Lights on the Receiver will Turn On (if this Doesn't Happen see Channel Set Up Below)



## **CHANNEL SET UP**

The Microphone/Receiver can Operate on 8 Different Channels. The Pair are Typically Set Up For Channel 1 as Shown Here. This can be Changed but **MUST BE THE SAME ON BOTH UNITS**. The Microphone Channel Can be Changed Unscrewing the Handle and Using the Included Screwdriver. The Receiver is Changed From the Front Panel (Use the Select Button to Pick a Channel and then Hold the Set Button to Keep this Pick)



## **Batteries**

- 2 X AA
- Lasts Approximately 12 Hours
- Accessed by Unscrewing the Handle



## **To Mute the Microphone Briefly Push the Bottom Button on the Microphone**

There is a Red Light in the Center When Muted

